

HELI

www.helichina.com


CDD16/ 20-TF

ELECTRIC STACKER

电动托盘堆垛车



载荷曲线图 Load curve

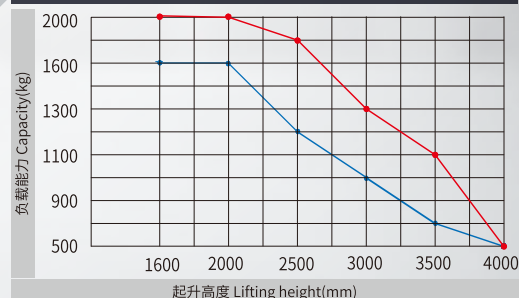

● CDD16-TF ● CDD20-TF

产品性能特点:

1.高强度货叉;2.C型+H型槽钢门架,高强度门架结实、耐用,不易变形;3.门架标配高位限速开关,当门架起升高度超过1.5m,降低行驶速度,提供操作安全性;4.起升自动限位,长寿命限位开关,标配1.8m限位;5.标配内置充电器、免维护电池,充电便捷;6.门架标配铁网罩,保障了操作人员的安全;7.48V永磁无刷驱动电机,免维护,效率高;8.标配紧急开关,可在意外发生时紧急断电;9.手柄配置紧急反向安全装置,防止操作人员行驶时受到挤压伤害;10.标配带绑定功能的刷卡管理系统;11.中置机械转向,标配保护臂、折叠踏板,操作便利。

CHARACTERISTICS: 1.High strength forks; 2.C-type+H-type channel steel frame, high-strength frame, sturdy and durable, not easily deformed; 3.The gantry is equipped with a high speed limit switch as standard. When the gantry height exceeds 1.5m, the driving speed is reduced to provide operational safety; 4.Automatic lifting limit, long-life limit switch, standard 1.8m limit; 5.Standard built-in charger and maintenance free battery, convenient to charge; 6.The standard iron mesh cover on the gantry ensures the safety of the operators; 7.48V permanent magnet brushless drive motor, maintenance free, high efficiency; 8.Equipped with an emergency switch, it can cut off power in case of an accident; 9.The handle is equipped with an emergency reverse safety device to prevent operators from being crushed and injured while driving; 10.Standard card swiping management system with binding function; 11.Mid mounted mechanical steering, standard with protective arm and folding pedal, easy to operate.



舒适·节能
COMFORT AND
ENERGY SAVING



稳定·可靠
STABLE AND
RELIABLE





智能·安全
INTELLIGENT
SECURITY



维修便捷
CONVENIENT
MAINTENANCE

特性	Feature	单位		
1.1 型号	Model		CDD16-TF	CDD20-TF
1.2 操作类型	Operating type		站架式 Stand on	站架式 Stand on
1.3 额定载重	Load capacity	kg	1600	2000
1.4 载荷中心距	Load center	mm	600	600
1.5 轴距	Wheel base	mm	1145	1145
车轮		Wheels		
2.1 轮子类型(前/后)	Wheels type		PU	PU
2.2 驱动轮/平衡轮/承重轮数量	Wheel quantity		1/2/4	1/2/4
2.3 驱动轮尺寸	Driving wheel size	mm	Φ195×70	Φ195×70
2.4 平衡轮尺寸	Balance wheel size	mm	Φ116×55	Φ116×55
2.5 承重轮尺寸	Bearing wheel size	mm	Φ73×60	Φ73×60
尺寸		Dimension		
3.1 标准门架起升高度	Standard lift height	mm	3000/3500/4000	3000/3500/4000
3.2 门架作业时整车最大高度	Max extend height	mm	3472/3972/4472	3472/3972/4472
3.3 门架缩回时整车静态高度	Mast lowered height	mm	2012/2262/2512	2012/2262/2512
3.4 货叉最低离地高度	Min.fork lowered height	mm	83	83
3.5 货叉外侧间距	Outside width between forks	mm	550/600/650/685	550/600/650/685
3.6 货叉内侧间距	Inside width between forks	mm	180/230/280/315	180/230/280/315
3.7 标准货叉规格	Fork size (length/width)	mm	1150/185/60	1150/185/60
3.8 整车全长(踏板放下/踏板收起)	Overall length	mm	2214/1812	2214/1812
3.9 车体宽度	Overall width	mm	780	780
3.10 最小转弯半径	Min.Turning radius	mm	1393	1393
3.11 最小直角堆垛通道宽度(托盘800×1200, 1200沿货叉放置) Min.Aisle width for pallets 800×1200		mm	2224	2224
3.12 最小直角堆垛通道宽度(托盘1000×1200, 1200沿货叉放置) Min.Aisle width for pallets 1000×1200		mm	2291	2291
性能		Performance		
4.1 最大行驶速度, 满载/空载	Travel speed, laden/unladen	km/h	4.2/5	4.2/5
4.2 最大起升速度, 满载/空载	Lift speed, laden/unladen	mm/s	116/165	105/165
4.3 最大下降速度, 满载/空载	Lowering speed, laden/unladen	mm/s	105/95	120/100
4.4 爬坡度, 满载/空载	Gradeability, laden/unladen	%	6/10	6/10
电气配置		Electrical configuration		
5.1 驱动电机/起升电机	Drive motor/ Lift motor		BLDC1.0/DC2.2	BLDC1.2/DC2.2
5.2 蓄电池电压/容量	Battery voltage / capacity	V/Ah	48/65	48/65
5.3 充电器规格	Charger specification	V/Ah	48/10	48/10
5.4 控制器型号	Controller		HELI(合力)	HELI(合力)
5.5 制动	Brake		电磁/再生 Electromagnetic/Regenerative	
重量		Weight		
6.1 蓄电池重量	Battery weight		15×4	15×4
6.2 自重(包含蓄电池)	Service weight with battery		710	725
其他		Other		
7.1 转向类型	Steering type		机械转向 Mechanical	机械转向 Mechanical

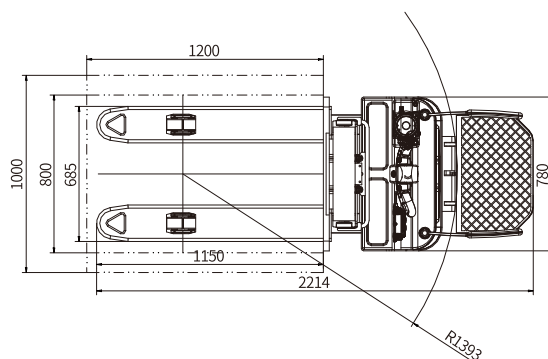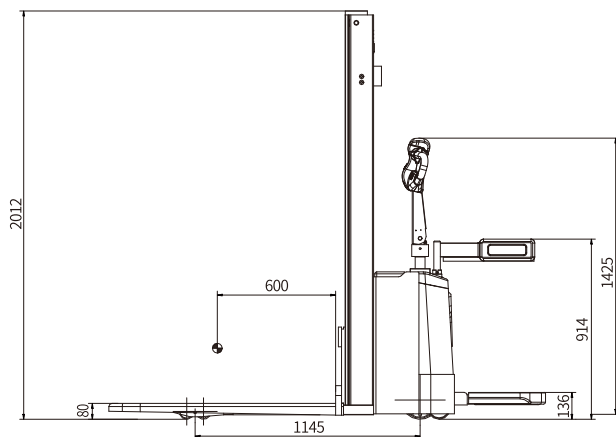

安徽合力股份有限公司
ANHUI HELI CO., LTD.

地址 / 中国 合肥方兴大道668号
Add / No.668, FangXing Road, Hefei, China
邮编 (Post Code) / 230000

客服热线 (Customer Service Hotline) / 4001-600761
服务电话 (Service Tel) / +86-551-63689000, 63648005

* 本公司保留更改产品设计和规格的权利, 恕不另行通知。
* Our products are subject to improvements and changes without notice.